9500 Series

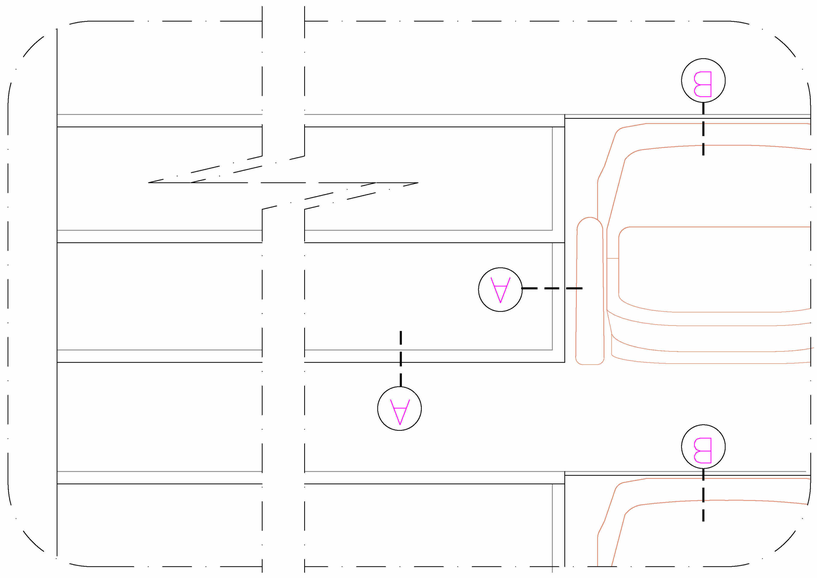

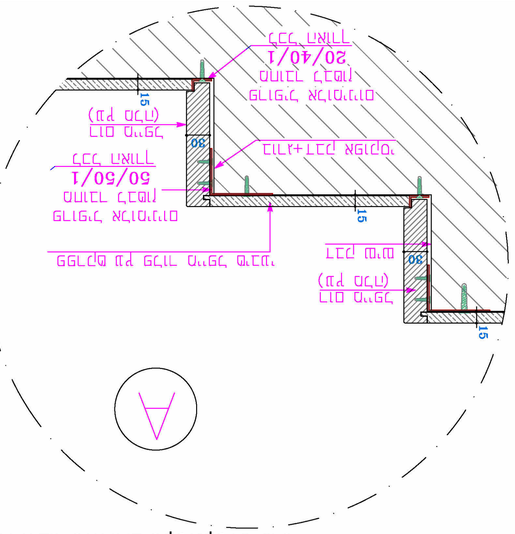

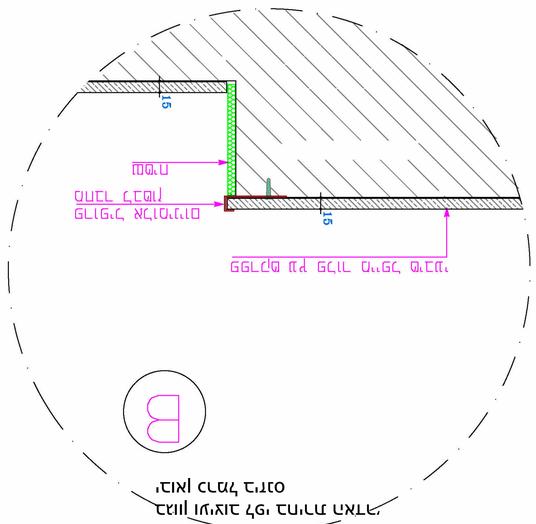

לבחור אחד מהבאים-- בחרו על פי גיזרת הגוף, הגובה והמשקל

לבחור אחד מהבאים: בחרו בגיזרת הגוף הקרובה ביותר לגובה ולמשקל של המטופל

גיזרה 17
גובה כיסא
AB
גובה מסגרת 755מ"מ
לבחור אחד מהבאים--
לבחור על פי גיזרת הגוף
גובה כיסא 430מ"מ
AB
גובה מסגרת 755מ"מ
לבחור אחד מהבאים--
עם או בלי משענת ראש
גובה כיסא 410מ"מ
מסגרת HL4100 בגובה אחיד
לבחור אחד מהבאים: משענת ראש קבועה, משענת ראש מתכווננת

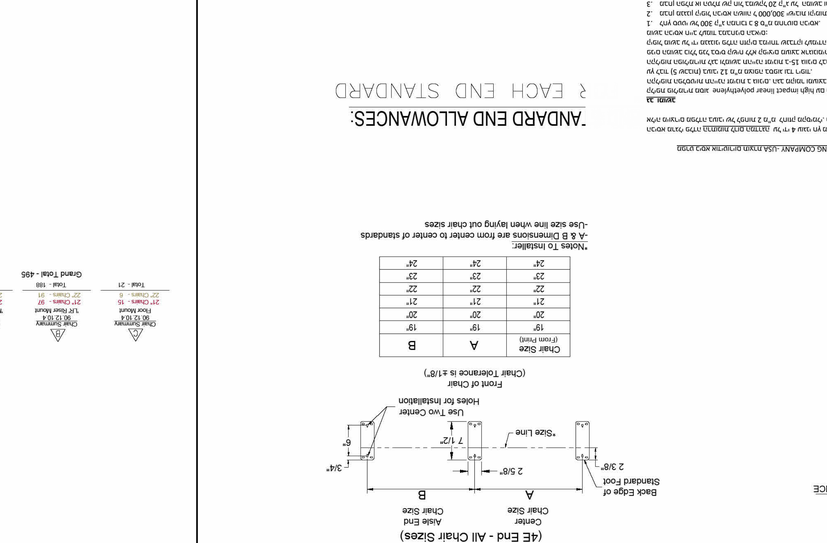

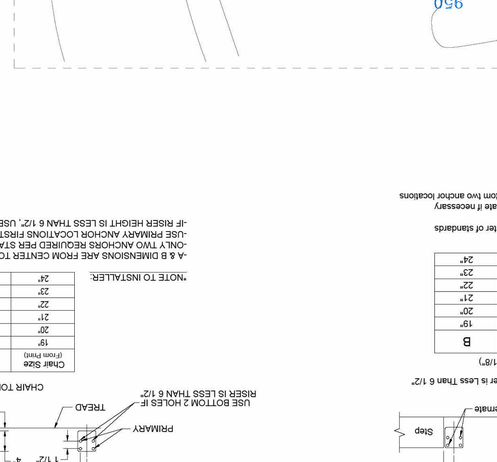

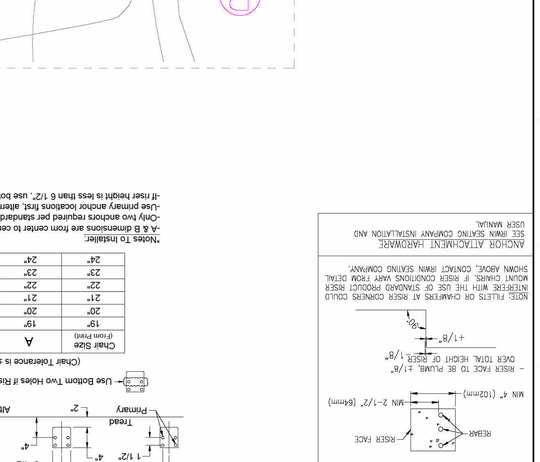

לבחור אחד מהבאים-- בחרו על פי גיזרת הגוף, הגובה והמשקל

לבחור אחד מהבאים: בחרו בגיזרת הגוף הקרובה ביותר לגובה ולמשקל של המטופל

גיזרה 17
גובה כיסא
AB
גובה מסגרת 755מ"מ
לבחור אחד מהבאים--
לבחור על פי גיזרת הגוף
גובה כיסא 430מ"מ
AB
גובה מסגרת 755מ"מ
לבחור אחד מהבאים--
עם או בלי משענת ראש
גובה כיסא 410מ"מ
מסגרת HL4100 בגובה אחיד
לבחור אחד מהבאים: משענת ראש קבועה, משענת ראש מתכווננת

PROJECT NOTES:

IF PRODUCT BECOMES AN ORDER, ALL BUILDING DIMENSIONS AND FLOOR ELEVATIONS WILL NEED TO BE PROVIDED AND/OR FIELD VERIFIED.

CHAIR NUMBER SCHEME SHOWN IS SUGGESTED. CUSTOMER MAY REQUEST AN ALTERNATE SCHEME.

CHAIRS ON MOVABLE BASES ARE SHOWN AT REQUESTED LOCATIONS.

PRELIMINARY

DESIGN INTENT OF CHAIRS IS TO BE MOUNTED TO:
CONCRETE

MIGDAL HAEMEK CULTURAL CENTER
ISRAEL

ORIGINATED BY: DIANA MULLER

CONTACT INFORMATION
PHONE: (616) 574-7474
E-MAIL: diana.muller@rtmseating.com

SCALE: NONE

PROJECT NUMBER
P44702

SHEET: 1 OF 2

ACCESSORY LEGEND

SYMBOL	ACCESSORY DESCRIPTION	QTY
	ROW TAGS: LP1 2" RD BRONZE – END PANEL	PER ROW
	SEAT TAGS: LP2 OVAL BRONZE – SEAT	PER ROW
(MB)	MOVABLE BASES: 1 SINGLE, 1 DOUBLE	2

90.12.10.4 - Citation Floor Mount Chairs
Full Fold Seat
Flat Wood Aisle Armrests
Flat Wood Center Armrests

Explanation of Dimensions
A = Back Flitch Allowance From Riser Face
B = Back Height
C = Seat to Down Position
D = Front Edge of Armrest on End Standard
E = Front Edge of Armrest on Center Standard

	Back Pitches Available				
A	7 7/8"	8 5/8"	9 1/4"	10 1/2	11 3/4"
B	34 3/4"	34 5/8"	34 1/4"	34"	33 3/8"
C	24 1/4"	24 7/8"	25 5/8"	26 1/4"	27 1/2"
D	15 3/8"	16"	16 5/8"	17 3/8"	18 5/8"
E	14 3/4"	15 1/4"	16"	16 5/8"	17 7/8"

CURRENT LAYOUT

2 3/8" FROM BACK EDGE OF STANDARD FOOT TO CHAIR SIZE LINE

Riser Height Range: 5" Min. TO 8" Max.

90.12.10.4 - Citation,LR Riser Mount Chairs
Full Fold Seat
Flat Wood Aisle Armrests
Flat Wood Center Armrests

Explanation of Dimensions
A = Back Flitch Overhang From Riser Face
B = Back Height
C = Seat to Down Position
D = Front Edge of Armrest on End Standard
E = Front Edge of Armrest on Center Standard

	Back Pitches Available				
A	3 1/16"	3 5/8"	4 1/8"	5"	7 1/16"
B	34 3/4"	34 5/8"	34 1/4"	34"	33 3/8"
C	24 1/4"	24 7/8"	25 5/8"	26 1/4"	27 1/2"
D	15 3/8"	16"	16 3/4"	17 3/8"	18 3/4"
E	14 3/4"	15 1/4"	16"	16 5/8"	17 7/8"

CURRENT LAYOUT

Riser Height Range: 8" Min. TO 16" Max.

90.12.10.4 - Citation ,MR Riser Mount Chairs
Full Fold Seat
Flat Wood Aisle Armrests
Flat Wood Center Armrests

Explanation of Dimensions
A = Back Flitch Overhang From Riser Face
B = Back Height
C = Seat to Down Position
D = Front Edge of Armrest on End Standard
E = Front Edge of Armrest on Center Standard

	Back Pitches Available				
A	1 1/16"	1 5/8"	2 1/8"	3"	4 1/4"
B	34 3/4"	34 5/8"	34 1/4"	34"	33 3/8"
C	24 1/4"	24 7/8"	25 5/8"	26 1/4"	27 1/2"
D	15 3/8"	16"	16 3/4"	17 3/8"	18 5/8"
E	14 3/4"	15 1/4"	16"	16 5/8"	17 7/8"

CURRENT LAYOUT

4C Drill Template
Riser Mount 'MR2' Standards
(4E End - All Chair sizes)

(Chair Tolerance is ±1/8")

Chair Size (From Print)	A	B
	19"	19"
	20"	20"
	21"	21"
	22"	22"
	23"	23"
	24"	24"

*Notes To Installer:
-A & B dimensions are from center of standards
-Only two anchors required per standard
-Use primary anchor locations first, alternate if necessary
-If riser height is less than 6 1/2", use bottom two anchor locations

4C DRILL TEMPLATE
RISER MOUNT 'LR' & 'LRP' STANDARDS
(4E END - ALL CHAIR SIZES)

CHAIR TOLERANCE IS +/- 1/8"

*NOTE TO INSTALLER:

Chair Size (From Print)	A	B
	19"	19"
	20"	20"
	21"	21"
	22"	22"
	23"	23"
	24"	24"

-A & B DIMENSIONS ARE FROM CENTER TO CENTER OF STANDARDS
-USE PRIMARY ANCHOR LOCATIONS FIRST, ALTERNATE IF NECESSARY
-ONLY TWO ANCHORS REQUIRED PER STANDARD
-IF RISER HEIGHT IS LESS THAN 6 1/2", USE BOTTOM TWO ANCHOR LOCATIONS

4C Drill Template
Concrete Floor - Floor Mount - 813 Foot
(4E End - All Chair Sizes)

(Chair Tolerance is ±1/8")

Chair Size (From Print)	A	B
	19"	19"
	20"	20"
	21"	21"
	22"	22"
	23"	23"
	24"	24"

*Notes To Installer:
-A & B Dimensions are from center of standards
-Use size line when laying out chair sizes

27" Chairs - 15
22" Chairs - 6

27" Chairs - 90
22" Chairs - 91

27" Chairs - 180
22" Chairs - 104

Grand Total - 695

ANCHOR ATTACHMENT HARDWARE

SEE RMWA SEATING COMPANY INSTALLATION AND USER MANUAL

NOTE: FILLETS OR CHAMFERS AT RISER CORNERS COULD INTERFERE WITH THE USE OF STANDARD FLOOR RISER MOUNT CHAIRS. IF RISER CONDITIONS VARY FROM DETAIL SHOWN ABOVE, CONTACT RMWA SEATING COMPANY.

RISER MOUNTING

- 4" MINIMUM THICKNESS WITH 2-1/2" FREE FROM OBSTRUCTIONS FROM THE RISER FACE
- 2 1/2" OF ANCHOR EMBEDMENT IS REQUIRED FOR MAXIMUM HOLDING STRENGTH
- RISER FACE TO BE PLUMB, +1/8" OVER TOTAL HEIGHT OF RISER

FLOOR MOUNTING

- 1" MINIMUM THICKNESS WITH A SURFACE 1-1/2" FREE OF REAR
- 2" OF ANCHOR EMBEDMENT IS REQUIRED FOR MAXIMUM HOLDING STRENGTH
- CONCRETE FLOORS TO BE SMOOTH (FREE FROM DIPS)

STANDARD PLUG

PAN, POURED CONCRETE MUST HAVE A MINIMUM OF 3" OF THICKNESS FROM THE HIGHEST POINT OF CORRUGATION AND BE FREE FROM OBSTRUCTIONS

MINIMUM CONCRETE REQUIREMENTS

- NEW CONCRETE:
- STRENGTH OF 3000 PSI
- MINIMUM OF 5000 PSI WITH A DRY WEIGHT OF 90-115 LBS PER CUBIC FOOT.
- PRE-EXISTING/OLD CONCRETE:
- CONCRETE SHOULD BE TESTED TO VERIFY THAT MINIMUM REQUIREMENTS CAN BE MET
- PLEASE CONTACT RMWA SEATING COMPANY IF ASSISTANCE IS NEEDED

SPECIAL PRODUCT NOTES:

NO SPECIAL PRODUCT NOTES REQUIRED

90.12.10.4 - Citation Floor Mount Chairs
Full Fold Seat
Flat Wood Aisle Armrests
Flat Wood Center Armrests

Explanation of Dimensions
A = Back Flitch Allowance From
B = Back Height
C = Seat to Down Position
D = Front Edge of Armrest on End Standard
E = Front Edge of Armrest on Center Standard

	Back Pitches Available				
A	7 7/8"	8 5/8"	9 1/4"	10 1/2	11 3/4"
B	34 3/4"	34 5/8"	34 1/4"	34"	33 3/8"
C	24 1/4"	24 7/8"	25 5/8"	26 1/4"	27 1/2"
D	15 3/8"	16"	16 5/8"	17 3/8"	18 5/8"
E	14 3/4"	15 1/4"	16"	16 5/8"	17 7/8"

CURRENT LAYOUT

2 3/8" FROM BACK EDGE OF STANDARD FOOT TO CHAIR SIZE LINE

STANDARD END ALLOWANCES:

2 EACH END STANDARD

CITATION - 021-IRWIN SEATING COMPANY-USA-ROHS COMPLIANT

UPON CASH APPROPRIATION FROM CUSTOMER. UNLESS OTHERWISE NOTED, ALL PRICES ARE FOR STANDARD PRODUCTS AS DESCRIBED IN THIS QUOTATION AND ARE FIRM FOR 30 DAYS FROM DATE OF QUOTATION. ALL PRICES ARE F.O.B. ORIGIN, FREIGHT PREPAID AND ADDED TO INVOICE UNLESS OTHERWISE NOTED. ALL ORDERS ARE SUBJECT TO CREDIT APPROVAL AND ACCEPTANCE BY IRWIN SEATING COMPANY AT ITS HOME OFFICE IN GRAND RAPIDS, MICHIGAN. ORDERS CANCELLED BY CUSTOMER MAY BE SUBJECT TO A CANCELLATION CHARGE. ORDERS FOR SPECIAL PRODUCTS OR SPECIAL FINISHES ARE NOT SUBJECT TO CANCELLATION. ORDERS FOR SPECIAL PRODUCTS OR SPECIAL FINISHES ARE NOT RETURNABLE. ORDERS FOR STANDARD PRODUCTS AND FINISHES ARE RETURNABLE ONLY WITH PRIOR AUTHORIZATION AND SUBJECT TO A RESTOCKING CHARGE. ALL RETURNS MUST BE SHIPPED PREPAID. ALL PRICES ARE SUBJECT TO CHANGE WITHOUT NOTICE. ALL ORDERS ARE SUBJECT TO ACCEPTANCE AT OUR HOME OFFICE IN GRAND RAPIDS, MICHIGAN.

14. LEGEND

WOVEN FABRIC: FABRIC YOU SELECT FROM A 2 TO 4 POINT WOVEN, VINYL OR FABRIC FOR SEATING AND BACKS.

LEATHER: GENUINE HIDE FROM A SELECTED TANNERY. LEATHER IS 3-4 OUNCE MEDIUM WEIGHT, GRADED, SELECTED AND MATCHED FOR SEATING AND BACKS.

VINYL: SEAT AND BACK VINYL IS 54" WIDE, 4 MILS THICK, FIRE RETARDANT, MILDEW RESISTANT AND ABRASION RESISTANT. VINYL IS AVAILABLE IN A WIDE RANGE OF COLORS AND TEXTURES.

15. FABRIC

ALL FABRICS SHALL BE 54" MINIMUM WIDTH, 100% SOLUTION DYED POLYPROPYLENE, HEAVY DUTY, HIGH PERFORMANCE, WOVEN FABRIC WITH A MINIMUM WEIGHT OF 19 OZ/SQ YD, AND A MINIMUM WEAR RATING OF 100,000 DOUBLE RUBS PER ASTM D-4157 (GM Crockmeter). FABRIC SHALL BE COLORFAST TO LIGHT (EXCEED 7 ON AATCC 16 OPTION E), WATER, AND PERSPIRATION. FABRIC SHALL BE FLAME RETARDANT AND PASS CALIFORNIA TB 117-2013 REQUIREMENTS. FABRIC SHALL BE CLEANABLE WITH MILD SOAP AND WATER SOLUTION AND RESISTANT TO BLEACH. FABRIC SHALL BE RESISTANT TO MILDEW AND MOLD GROWTH AS TESTED BY ASTM G-21 AND ASTM G-22. FABRIC SHALL BE RESISTANT TO STAINING AS TESTED BY AATCC 175 STAIN RELEASE TEST. FABRIC SHALL BE RESISTANT TO SNAGGING AS TESTED BY ASTM D-3939 (MODIFIED). FABRIC SHALL BE RESISTANT TO PILLING AS TESTED BY ASTM D-4970 (MODIFIED). FABRIC SHALL BE RESISTANT TO SHRINKAGE AS TESTED BY AATCC 135 (MODIFIED). FABRIC SHALL BE RESISTANT TO FADING AS TESTED BY AATCC 16 OPTION E (MODIFIED). FABRIC SHALL BE RESISTANT TO SEAM SLIPPAGE AS TESTED BY ASTM D-4034 (MODIFIED). FABRIC SHALL BE RESISTANT TO SEAM SLIPPAGE AS TESTED BY ASTM D-4034 (MODIFIED).

16. LEATHER

LEATHER SHALL BE GENUINE HIDE FROM A SELECTED TANNERY. LEATHER IS 3-4 OUNCE MEDIUM WEIGHT, GRADED, SELECTED AND MATCHED FOR SEATING AND BACKS.

17. VINYL

VINYL SHALL BE 54" MINIMUM WIDTH, 100% SOLUTION DYED POLYPROPYLENE, HEAVY DUTY, HIGH PERFORMANCE, WOVEN FABRIC WITH A MINIMUM WEIGHT OF 19 OZ/SQ YD, AND A MINIMUM WEAR RATING OF 100,000 DOUBLE RUBS PER ASTM D-4157 (GM Crockmeter). FABRIC SHALL BE FLAME RETARDANT AND PASS CALIFORNIA TB 117-2013 REQUIREMENTS. FABRIC SHALL BE CLEANABLE WITH MILD SOAP AND WATER SOLUTION AND RESISTANT TO BLEACH. FABRIC SHALL BE RESISTANT TO MILDEW AND MOLD GROWTH AS TESTED BY ASTM G-21 AND ASTM G-22. FABRIC SHALL BE RESISTANT TO STAINING AS TESTED BY AATCC 175 STAIN RELEASE TEST. FABRIC SHALL BE RESISTANT TO SNAGGING AS TESTED BY ASTM D-3939 (MODIFIED). FABRIC SHALL BE RESISTANT TO PILLING AS TESTED BY ASTM D-4970 (MODIFIED). FABRIC SHALL BE RESISTANT TO SHRINKAGE AS TESTED BY AATCC 135 (MODIFIED). FABRIC SHALL BE RESISTANT TO FADING AS TESTED BY AATCC 16 OPTION E (MODIFIED). FABRIC SHALL BE RESISTANT TO SEAM SLIPPAGE AS TESTED BY ASTM D-4034 (MODIFIED). FABRIC SHALL BE RESISTANT TO SEAM SLIPPAGE AS TESTED BY ASTM D-4034 (MODIFIED).

18. WARRANTY

WARRANTY: MATERIAL AND WORKMANSHIP (EXCLUDING FABRIC, LEATHER, VINYL) FOR A PERIOD OF FIVE (5) YEARS FROM DATE OF SHIPMENT. SEE IRWIN SEATING COMPANY WARRANTY FOR COMPLETE DETAILS.

19. PACKAGING

PACKAGING: STANDARD PACKAGING IS SUITABLE FOR DOMESTIC SHIPMENT BY COMMON CARRIER. SPECIAL PACKAGING FOR EXPORT OR OTHER METHODS OF SHIPMENT AVAILABLE UPON REQUEST AT ADDITIONAL COST.

20. SHIPPING

SHIPPING: ALL SHIPMENTS ARE F.O.B. ORIGIN, FREIGHT PREPAID AND ADDED TO INVOICE UNLESS OTHERWISE NOTED. ALL ORDERS ARE SUBJECT TO CREDIT APPROVAL AND ACCEPTANCE BY IRWIN SEATING COMPANY AT ITS HOME OFFICE IN GRAND RAPIDS, MICHIGAN. ORDERS CANCELLED BY CUSTOMER MAY BE SUBJECT TO A CANCELLATION CHARGE. ORDERS FOR SPECIAL PRODUCTS OR SPECIAL FINISHES ARE NOT RETURNABLE. ORDERS FOR STANDARD PRODUCTS AND FINISHES ARE RETURNABLE ONLY WITH PRIOR AUTHORIZATION AND SUBJECT TO A RESTOCKING CHARGE. ALL RETURNS MUST BE SHIPPED PREPAID. ALL PRICES ARE SUBJECT TO CHANGE WITHOUT NOTICE. ALL ORDERS ARE SUBJECT TO ACCEPTANCE AT OUR HOME OFFICE IN GRAND RAPIDS, MICHIGAN.

REVISIONS			
ZONE	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	9/13/23	DM
B	PER NEW CAD FILE RECEIVED	10/30/23	DM

Revision 1	1	30/10/25
Drawn By	Checked	Date

Drawing No.	W-602
Project No.	1758
Scale	1/16" = 1'-0"
Date	30/10/25
Revision	1

Tel-Aviv 32 Nahalat Itzhak St. 6744832-כ.ס - 7442321 ת"ד, 6744832 תל-אביב
Tel: 03-6918588-טל' 03-6918787 פקס: 03-6918787
Email: office@notaricohecta.com office@NotaricohecTa.com

חברת הכנסת -ורית הרוש

Project

רישיון עו"ד

Drawing

W-602

Drawing No.

עו"ד

Author

Drawn by

Checker

Checked

1758

Project No.

Scale

30/10/25

Date

1

Revision

Final

Bidding

Design

C:\Users\Doc\Documents\758_003-Small_Jobs\SVW.rvt

File Path